



A-OK

®

AI Motors Specialist

AM49

Dual- Motor

Day & Light Honeycomb System

The Art of Light and Shadow
Effortless Retraction

Product Characteristics

01

Dual Motor Output

Day & Night Control

Dual motors operate in precise synchronisation, delivering balanced and stable output for an exceptionally smooth user experience

Stays permanently Flat

The patented rope winder completely eliminates tangling. A high-strength 6 mm hexagonal iron shaft core resists torsion and deformation, keeping the extra-large curtain surface sleek, pristine and free from damage.



AC 100-240v
Wide Voltage Input

Integrated
Power Supply Design

Innovative super Short
Motor Length is 160mm

Innovative Patented Design


Rope Winder



A complete system solution
Delivers Stable And Reliable Performance

Rope Winder

AM49 Motor

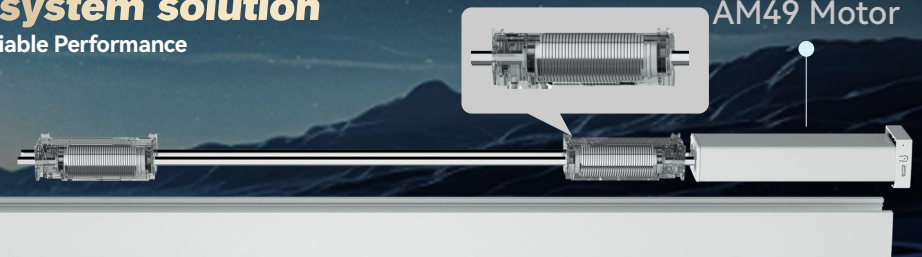

DAY AND NIGHT HONEYCOMB


HAVE A HAPPY FAMILY LIFE

App & Voice Control

Based on intelligent technology, our independently developed A-OK app brings a smooth, comfortable and outstanding experience to everyone. Control your smart home with voice commands

Family Scene Mode

Easy operation, worry-free control, effortlessly adjust blind to create a perfect family life for you

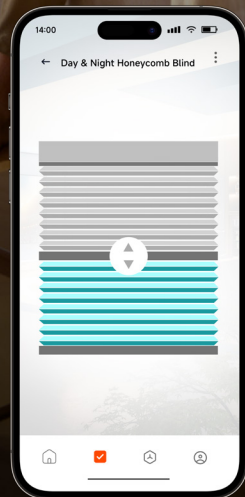

Day & night fabric raise simultaneously



Day & night fabric lower simultaneously



Day fabric down, night fabric up




Day fabric up, night fabric down


A Wonderful Experience

Simplified System, Easy Installation

Symmetrical Layout Ensures Uniform Force Distribution

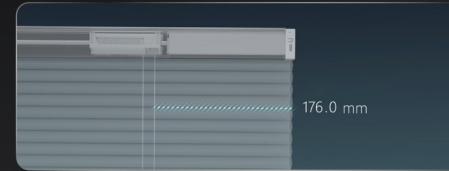


The pull rope of the day & night honeycomb blind is only 176mm from the edge, ensuring more stable operation

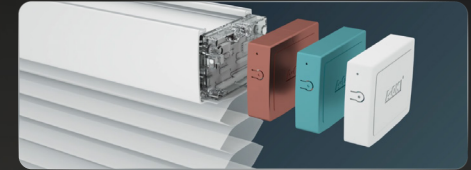


Freely switch end cap colors to easily match home decor styles, Wide voltage input, 100V~240V Double-sided symmetrical design allows hassle-free installation



The day & night honeycomb blind motor has a built-in antenna, which is beautiful and concise with more stable signal reception

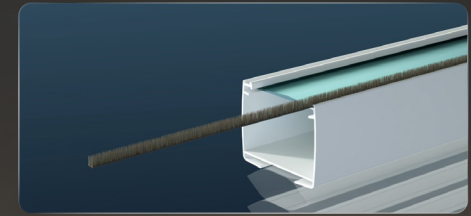

Built-in light-shielding wool strip, 99.9% light sealing, defining true full light blocking

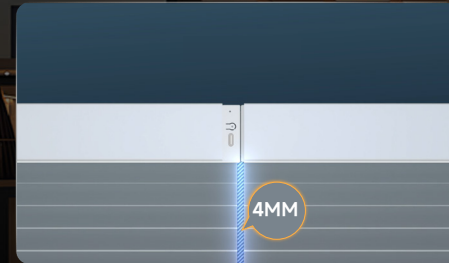

The blind is installed side by side with a gap of only 4mm, supporting the use of multiple curtains side by side



The blind uses a fully symmetrical layout with even cord tension. Sizes range from 520 mm to 3x3m, covering everything from narrow windows to large openings

Product Parameters

Product model	AM49-0.8/34-MEL-P-W
Input voltage	AC100~240V/50/60Hz
Rated power	34W(100V)/34W(240V)
Rated torque	0.8 N.m
Rated speed	34rpm

Control method	RF remote control/Tuya
Receiving frequency	433.92MHz
Receiving distance	≥60 (Open area)
Noise (suspended)	45dB/30cm

Protection level	IP42
Operating temperature	-10°C ~ +60°C



GUANGDONG A-OK TECHNOLOGY GRAND DEVELOPMENT CO.,LTD

Headquarter: 21st Floor, Bldg. A, Time Square Excellence, Bao'an CBD, Qianhai Bay, Shenzhen, Guangdong, CN
Manufacture plant: Hexing Road South side, Sanhe Economic Development Zone, Huiyang, Huizhou, Guangdong, CN

T:0086-752-5717888 E:cnaok5@aoksz.com

Copyright ©2024 ,Guangdong A-OK Technology Grand Development Co., Ltd. All rights reserved.



www.a-okmotor.com